

Panasonic
樂聲牌

煙囗式抽油煙機
RANGE HOOD
FV-953P



Panasonic®

Panasonic Ecology System Co., Ltd.

CATALOG NO: P-RH004

本產品目錄只供參考，資料已經過細心核對，如有錯誤，以廠方生產的規格為準。
本公司保留更改產品設計及價格之權利，恕不另行通知。
如有任何爭議，信興電器貿易有限公司保留最終決定權。

10/2018
顧客服務熱線: 2833 0955
維修服務熱線: 2406 5666
零件部熱線: 2406 5555
www.panasonic.hk

信興集團 信興電器貿易有限公司





簡約時尚設計，盡享生活質感
Quality of life with simple enjoyment

Panasonic 煙囪式抽油煙機 FV-953P，煙囪式設計，外型簡約時尚，能完美配合現代廚房設計。採用電子輕觸式控制玻璃板面及新增各項功能，操作方便簡易，讓入廚為樂的用家更得心應手。

FV-953P chimney type range hood from Panasonic comes in stylish design. Its sleek appearance is a perfect fit in modern kitchen interior. The electronic soft-touch glass panel offers various features, making it enjoyable and pleasant to cook.



時鐘功能

新增時鐘及鬧鐘功能，更易掌握烹調時間，為家人煮出好味道

Clock & Alarm

Newly added clock and alarm function, deliver delicacy to family timely.



風力模式

三檔風力模式，能配合多款烹調方法

Speed level

3 levels of speed for various cooking methods



延時關機

設有延時關機功能，烹調完成後，按開關鍵一次便可延時三分鐘，吸走剩餘油煙後自動關機

Prolonged off-timer

Designed with Prolonged off-timer. Press on/off button once for exhausting oil fumes from kitchen and it will be turned off after 3 mintues automatically



輕觸式控制玻璃板面

全新電子輕觸式控制玻璃板面，輕按即可

Electronic soft-touch panel

A brand new electronic soft-touch glass with gentle press



特殊塗層及隔油欄

使用特殊塗層及隔油欄，不易沾油，清理更簡易方便

Special coating & filter frame

Easy to clean, thanks to special coating and filter frame



環保LED燈

機身附有環保LED燈照明設備

LED lamp

LED lamp for cooking assistance



吸力強勁

特設千翼渦輪，強勁吸力，抽走廚房油煙

Powerful performance

Powerful "Sirocco" Fan Design

型號 Model	FV-953P		
按鈕 Switch	電子輕觸式 Electronic soft-touch		
電壓 Voltage [V]	220		
頻率 Frequency [Hz]	50		
風速 Speed	高 High	中 Medium	低 Low
耗電量 [瓦特] (不連電燈 without lamp) Power Consumption [Watt]	200	165	130
風量 Air Volume ⁽¹⁾⁽²⁾ [m³/min]	17.5	15	13
延時關機功能 Prolonged Off-Timer	○		
顏色 Colour	銀色 Silver		
電燈 [瓦特] Lamp [Watt]	1.5W x 2 發光二極管型燈 LED Lamp		
摩打 / 風扇數量 No. of Motor / Fan	1 / 1		
風扇種類 Fan Type	千翼渦輪 Sirocco Fan		
尺寸 Dimension [mm]	896 (W) x 535 (D) x 566-835(H)		
重量 Net Weight [kg] ⁽³⁾	26		
管道直徑 Air Duct Dia. [mm]	Ø190		

備註/Remarks :

1. 風量及電氣特性的數據是在靜壓 0Pa 下測出的數值。
The data of air volume and electrical characteristics are measured at static pressure 0Pa

2. 測量值與表示值之間的容許公差為 -10%
The allowable difference between measured value and indicative value is -10%

3. 產品重量包括安裝和使用所需配件的重量，如掛板，止回閥，排煙道，螺絲等。
The product weight includes the weight of accessories required for installation and usage, such as hang boards, adapter ring, smoke duct, screws, etc.

安裝前確認事項 Items to check before installation


煮食爐具面與抽油煙機最低部位的最小距離至少為 650 毫米，
如下圖所示：

The minimum distance between the supporting surface of cooking utensils on the cooking range and lowest end of the range hood must be 650mm, as shown in the pictures below:

建議產品安裝在天花距離地面高度 ≥ 2.3 米的廚房。

It is recommended to install the product in a kitchen where the ceiling is ≥ 2.3 m above ground.


單位: 毫米
Unit: mm

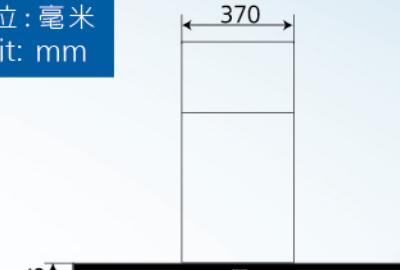


370

正面
Front

單位: 毫米
Unit: mm




排煙管隱藏在櫃子裏。
The smoke duct is concealed in the cabinet.



排煙管非隱藏在櫃子裏。
The smoke duct is not concealed in the cabinet.

- ① 櫃子裏
In the cabinet
- ② 櫃子上
On the cabinet
- ③ 上裝飾罩
Duct cover upper
- ④ 下裝飾罩
Duct cover lower

建議預留廚櫃淨深度 : 350
It is suggested to reserve the net depth of cabinet: 350

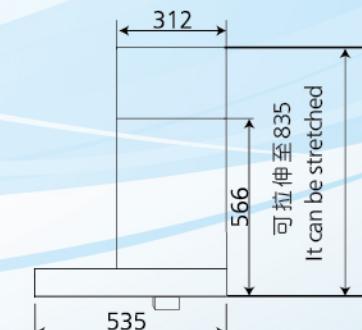

側面
Side

75

896

312

566

535

可拉伸至 835
It can be stretched