


# Panasonic®

## Air conditioner Installation Instruction

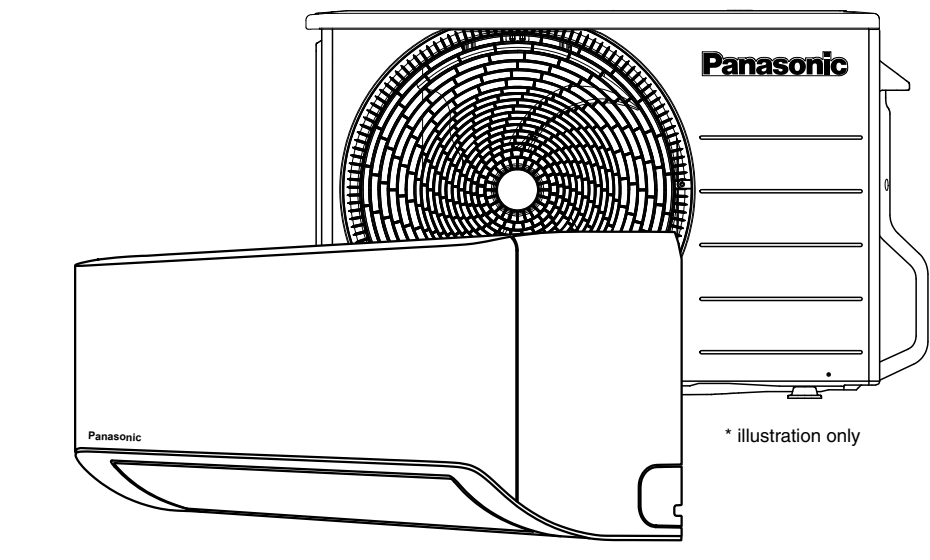

MODEL NO : CS/CU-RU18\*\*\* (2.0HP) CS/CU-RU24\*\*\* (2.5HP)

### CAUTION

## R32 REFRIGERANT

This Air Conditioner contains and operates with refrigerant R32.

THIS PRODUCT MUST ONLY BE INSTALLED OR SERVICED BY QUALIFIED PERSONNEL

Refer to National, State, Territory and local legislation, regulations, codes, installation & operation manuals, before the installation, maintenance and/or service of this product.

Explanation of symbols displayed on the indoor unit or outdoor unit.

	<b>WARNING</b>	This symbol shows that this equipment uses a flammable refrigerant. If the refrigerant is leaked, together with an external ignition source, there is a possibility of ignition.
	<b>CAUTION</b>	This symbol shows that the Installation Manual should be read carefully.
	<b>CAUTION</b>	This symbol shows that a service personnel should be handling this equipment with reference to the Installation Manual.
	<b>CAUTION</b>	This symbol shows that there is information included in the Operation Manual and/or Installation Manual.

### SAFETY PRECAUTIONS

- Read the following "SAFETY PRECAUTIONS" carefully before installation.
- Electrical work must be installed by a licensed electrician. Be sure to use the correct rating of the power plug and main circuit for the model to be installed.
- The caution items stated here must be followed because these important contents are related to safety. The meaning of each indication used is as below. Incorrect installation due to ignoring of the instruction will cause harm or damage, and the seriousness is classified by the following indications.

	<b>WARNING</b>	This indication shows the possibility of causing death or serious injury.		Symbol with white background denotes item that is PROHIBITED.
	<b>CAUTION</b>	This indication shows the possibility of causing injury or damage to properties only.		Symbol with dark background denotes item that must be carried out.

- Carry out test running to confirm that no abnormality occurs after the installation. Then, explain to user the operation, care and maintenance as stated in instructions. Please remind the customer to keep the operating instructions for future reference.

If the equipment is transferred to a new user or delivered to a recycling plant, be sure also to hand over the manual.

### WARNING

- Do not use means to accelerate the defrosting process or to clean, other than those recommended by the manufacturer. Any unit method or using incompatible material may cause product damage, burst and serious injury.
- Do not install outdoor unit near handrail of veranda. When installing air-conditioner unit on veranda of a high rise building, child may climb up to outdoor unit and cross over the handrail causing an accident.
- Do not use unspecified cord, modified cord, joint cord or extension cord for power supply cord. Do not share the single outlet with other electrical appliances. Poor contact, poor insulation or over current will cause electrical shock or fire.
- Do not tie up the power supply cord into a bundle by hand. Abnormal temperature rise on power supply cord may happen.
- Do not insert your fingers or other objects into the unit, high speed rotating fan may cause injury.
- Do not sit or step on the unit, you may fall down accidentally.
- Keep plastic bag (packing material) away from small children, it may cling to nose and mouth and prevent breathing.
- When installing or relocating air conditioner, do not let any substance other than the specified refrigerant, eg. air etc mix into refrigeration cycle (piping). Mixing of air etc. will cause abnormal high pressure in refrigeration cycle and result in explosion, injury etc.
- Do not pierce or burn as the appliance is pressurized. Do not expose the appliance to heat, flame, sparks, or other sources of ignition. Else, it may explode and cause injury or death.
- Do not add or replace refrigerant other than specified type. It may cause product damage, burst and injury etc.

- For R32/R410A model, use piping, flare nut and tools which is specified for R32/R410A refrigerant. Using of existing (R22) piping, flare nut and tools may cause abnormally high pressure in the refrigerant cycle (piping), and possibly result in explosion and injury.
- For R32 and R410A, the same flare nut on the outdoor unit side and pipe can be used.

- Since the working pressure for R32/R410A is higher than that of refrigerant R22 model, replacing conventional piping and flare nuts on the outdoor unit side are recommended.

- If reuse piping is unavoidable, refer to instruction "IN CASE OF REUSING EXISTING REFRIGERANT PIPING"
- Thickness of copper pipes used with R32/R410A must be more than 0.8 mm. Never use copper pipes thinner than 0.8 mm.
- It is desirable that the amount of residual oil less than 40 mg/10 m.

- Engage authorized dealer or specialist for installation.
- If installation done by the user is incorrect, it will cause water leakage, electrical shock or fire.

- For refrigeration system work, install according to this installation instructions strictly. If installation is defective, it will cause water leakage, electrical shock or fire.

- Use the attached accessories parts and specified parts for installation. Otherwise, it will cause the set to fall, water leakage, fire or electrical shock.

- Install at a strong and firm location which is able to withstand weight of the set. If the strength is not enough or installation is not properly done, the set will drop and cause injury.
- For electrical work, follow the national regulation, legislation and this installation instructions. An independent circuit and single outlet must be used. If electrical circuit capacity is not enough or defect found in the electrical work, it will cause electrical shock or fire.

- Do not use joint cable for indoor / outdoor connection cable. Use the specified indoor/outdoor connection cable, refer to instruction ⑤ **CONNECT THE CABLE TO THE INDOOR UNIT** and connect tightly for indoor/outdoor connection. Clamp the cable so that no external force will have impact on the terminal. If connection or fixing is not perfect, it will cause heat up or fire at the connection.

- Wire routing must be properly arranged so that control board cover is fixed properly. If control board cover is not fixed perfectly, it will cause fire or electrical shock.
- This equipment is strongly recommended to be installed with Earth Leakage Circuit Breaker (ELCB) or Residual Current Device (RCD), with a sensitivity of 30 mA at 0.1 sec or less. Otherwise, it may cause electrical shock and fire in case of equipment breakdown or insulation breakdown.

- During installation, install the refrigerant piping properly before running the compressor. Operation of compressor without fixing refrigeration piping and valves at opened position will cause suck-in of air, abnormal high pressure in refrigeration cycle and result in explosion, injury etc.

- During pump down operation, stop the compressor before removing the refrigeration piping. Removal of refrigeration piping while compressor is operating and valves are opened will cause suck-in of air, abnormal high pressure in refrigeration cycle and result in explosion, injury etc.

- Tighten the flare nut with torque wrench according to specified method. If the flare nut is over-tightened, after a long period, the flare may break and cause refrigerant gas leakage.

- After completion of installation, confirm there is no leakage of refrigerant gas. It may generate toxic gas when the refrigerant contacts with fire.
- Ventilate if there is refrigerant gas leakage during operation. It may cause toxic gas when the refrigerant contacts with fire.
- Be aware that refrigerants may not contain an odour.

### 8. Charging procedures

- In addition to conventional charging procedures, the following requirements shall be followed.
  - Ensure that contamination of different refrigerants does not occur when using charging equipment.
  - Hoses or lines shall be as short as possible to minimize the amount of refrigerant contained in them.
  - Cylinders shall be kept in an appropriate position according to the instructions.
  - Ensure that the refrigerating system is earthed prior to charging the system with refrigerant.
  - Label the system when charging is complete (if not already).
  - Extreme care shall be taken not to over fill the refrigerating system.
  - Prior to recharging the system it shall be pressure tested with OFN (refer to #7).
  - The system shall be leak tested on completion of charging but prior to commissioning.
  - A follow up leak test shall be carried out prior to leaving the site.
- Electrostatic charge may accumulate and create a hazardous condition when charging and discharging the refrigerant. To avoid fire or explosion, dissipate static electricity during transfer by grounding and bonding containers and equipment before charging/discharging.

### 9. Decommissioning

- Before carrying out this procedure, it is essential that the technician is completely familiar with the equipment and all its details.
- It is recommended good practice that all refrigerants are recovered safely.
- Prior to the task being carried out, an oil and refrigerant sample shall be taken in case analysis is required prior to re-use of recovered refrigerant.
- It is essential that electrical power is available before the task is commenced.
  - Become familiar with the equipment and its operation.
  - Isolate system electrically.
  - Before attempting the procedure ensure that:
    - mechanical handling equipment is available, if required, for handling refrigerant cylinders;
    - all personal protective equipment is available and being used correctly;
    - the recovery process is supervised at all times by a competent person;
    - recovery equipment and cylinders conform to the appropriate standards.
- Pump down refrigerant system, if possible.
  - If a vacuum is not possible, make a manifold so that refrigerant can be removed from various parts of the system.
  - Make sure that cylinder is situated on the scales before recovery takes place.
  - Start the recovery machine and operate in accordance with instructions.
  - Do not over fill cylinders. (No more than 80 % volume liquid charge).
  - Do not exceed the maximum working pressure of the cylinder, even temporarily.
  - When the cylinders have been filled correctly and the process completed, make sure that the cylinders and the equipment are removed from site promptly and all isolation valves on the equipment are closed off.
  - Recovered refrigerant shall not be charged into another refrigerating system unless it has been cleaned and checked.
- Electrostatic charge may accumulate and create a hazardous condition when charging or discharging the refrigerant. To avoid fire or explosion, dissipate static electricity during transfer by grounding and bonding containers and equipment before charging/discharging.

### 10. Labelling

- Equipment shall be labelled stating that it has been de-commissioned and emptied of refrigerant.
- The label shall be dated and signed.
- Ensure that there are labels on the equipment stating the equipment contains flammable refrigerant.

### 11. Recovery

- When removing refrigerant from a system, either for servicing or decommissioning, it is recommended good practice that all refrigerants are removed safely.
- When transferring refrigerant into cylinders, ensure that only appropriate refrigerant recovery cylinders are employed.
- Ensure that the correct number of cylinders for holding the total system charge are available.
- All cylinders to be used are designated for the recovered refrigerant and labelled for that refrigerant (i.e. special cylinders for the recovery of flammable refrigerant).
- Cylinders shall be complete with pressure relief valve and associated shut-off valves in good working order.
- Recovery cylinders are evacuated and, if possible, cooled before recovery occurs.
- The recovery equipment shall be in good working order with a set of instructions concerning the equipment that is at hand and shall be suitable for the recovery of concerning the equipment that is at hand and shall be suitable for the recovery of flammable refrigerants.
- In addition, a set of calibrated weighing scales shall be available and in good working order.
- Hoses shall be complete with leak-free disconnect couplings and in good condition.
- Before using the recovery machine, check that it is in satisfactory working order, has been properly maintained and that any associated electrical components are checked to prevent ignition in the event of a refrigerant release.
- Consult manufacturer if in doubt.
- The recovered refrigerant shall be returned to the refrigerant supplier in the correct recovery cylinder, and the relevant Waste Transfer Note arranged.
- Do not mix refrigerants in recovery units and especially not in cylinders.
- If compressors or compressor oils are to be removed, ensure that they have been evacuated to an acceptable level to make certain that flammable refrigerant does not remain within the lubricant.
- The evacuation process shall be carried out prior to returning the compressor to the suppliers.
- Only electric heating to the compressor body shall be employed to accelerate this process.
- When oil is drained from a system, it shall be carried out safely.

- This equipment must be properly earthed. Earth line must not be connected to gas pipe, water pipe, earth of lightning rod and telephone. Otherwise, it may cause electrical shock in case of equipment breakdown or insulation breakdown.

### CAUTION

- Do not install the unit in a place where leakage of flammable gas may occur. In case gas leaks and accumulates at surrounding of the unit, it may cause fire.
- Prevent liquid or vapor from entering sumps or sewers since vapor is heavier than air and may form suffocating atmospheres.
- Do not release refrigerant during piping work for installation, re-installation and during repairing refrigeration parts. Take care of the liquid refrigerant, it may cause frostbite.
- Do not install this appliance in a laundry room or other location where water may drip from the ceiling, etc.
- Do not touch the sharp aluminium fin, sharp parts may cause injury.

- Carry out drainage piping as mentioned in installation instructions. If drainage is not perfect, water may enter the room and damage the furniture.
- Select an installation location which is easy for maintenance. Incorrect installation, service or repair of this air conditioner may increase the risk of rupture and this may result in loss damage or injury and/or property.
- Power supply connection to the room air conditioner.
  - Use power supply cord 3 x 1.5 mm<sup>2</sup> (2.0HP), 3 x 2.5 mm<sup>2</sup> (2.5HP) type designation 60245 IEC 57 or heavier cord.
  - Connect the power supply cord of the air conditioner to the mains using one of the following method.

- Power supply point should be in easily accessible place for power disconnection in case of emergency.
- In some countries, permanent connection of this air conditioner to the power supply is prohibited.
  - Power supply connection to the receptacle using power plug.
  - Use an approved 16 A (2.0HP) or 20 A (2.5HP) power plug with earth pin for the connection to the socket.

- Power supply connection to a circuit breaker for the permanent connection.
  - Use an approved 16 A (2.0HP) or 20 A (2.5HP) circuit breaker for the permanent connection. It must be a double pole switch with a minimum 3.0 mm contact gap.

- Installation work. It may need two people to carry out the installation work.
- Keep any required ventilation openings clear of obstruction.

### PRECAUTION FOR USING R32 REFRIGERANT

- Pay careful attention to the following points and the installation work procedures.

### WARNING

- The appliance shall be stored, installed and operated in a well ventilated room with indoor floor area larger than A<sub>min</sub> (m<sup>2</sup>) [refer Table A] and without any continuously operating ignition source. Keep away from open flames, any operating gas appliances or any operating electric heater. Else, it may explode and cause injury or death.
- The mixing of different refrigerants within a system is prohibited. Models that use refrigerant R32 and R410A have a different charging port thread diameter to prevent erroneous charging with refrigerant R22 and for safety. Therefore, check beforehand. (The charging port thread diameter for R32 and R410A is 12.7 mm (1/2 inch).)
  - Ensure that foreign matter (oil, water, etc.) does not enter the piping.
  - Also, when storing the piping, securely seal the opening by pinching, taping, etc. (Handling of R32 is similar to R410A.)
- Operation, maintenance, repairing and refrigerant recovery should be carried out by trained and certified personnel in the use of flammable refrigerants and as recommended by the manufacturer. Any personnel conducting an operation, servicing or maintenance on a system or associated parts of the equipment should be trained and certified.
- Any part of refrigerating circuit (evaporators, air coolers, AHU, condensers or liquid receivers) or piping should not be located in the proximity of heat sources, open flames, operating gas appliance or an operating electric heater.
- The user/owner or their authorized representative shall regularly check the alarms, mechanical ventilation and detectors, at least once a year, where as required by national regulations, to ensure their correct functioning.
- A logbook shall be maintained. The results of these checks shall be recorded in the logbook.
- In case of ventilations in occupied spaces shall be checked to confirm no obstruction.
- Before a new refrigerating system is put into service, the person responsible for placing the system in operation should ensure that trained and certified operating personnel are instructed on the basis of the instruction manual about the construction, supervision, operation and maintenance of the refrigerating system, as well as the safety measures to be observed, and the properties and handling of the refrigerant used.
- The general requirement of trained and certified personnel are indicated as below:
  - Knowledge of legislation, regulations and standards relating to flammable refrigerants; and,
  - Detailed knowledge of and skills in handling flammable refrigerants, personal protective equipment, refrigerant leakage prevention, handling of cylinders, charging, leak detection, recovery and disposal; and,
  - Able to understand and to apply in practice the requirements in the national legislation, regulations and Standards; and,
  - Continuously undergo regular training to maintain this expertise.
- Air-conditioner piping in the occupied space shall be installed in such a way to protect against accidental damage in operation and service.
- Precautions shall be taken to avoid excessive vibration or pulsation to refrigerating piping.
- Ensure protection devices, refrigerating piping and fittings are well protected against adverse environmental effects (such as the danger of water collecting and freezing in relief pipes or the accumulation of dirt and debris).
- Expansion and contraction of long runs piping in refrigerating systems shall be designed and installed securely (mounted and guarded) to minimize the likelihood hydraulic shock damaging the system.
- Protect the refrigerating system from accidental rupture due to moving furniture or reconstruction activities.
- To ensure no leaking, field-made refrigerant joints indoors shall be tightness tested. The test method shall have a sensitivity of 5 grams per year of refrigerant or better under a pressure of at least 0.25 times the maximum allowable pressure (>1.04MPa, max 4.15MPa). No leak shall be detected.

Required tools for Installation Works			
1	Phillips screw driver	6	Pipe cutter
2	Level gauge	7	Reamer
3	Electric drill, hole core drill (ø70 mm)	8	Knife
4	Hexagonal wrench (4 mm)	9	Gas leak detector
5	Spanner	10	Measuring tape
11	Thermometer	12	Megameter
13	Multimeter	14	Vacuum pump
15	Gauge manifold	16	Torque wrench

### Attached accessories

No.	Accessories part	Qty.	No.	Accessories part	Qty.
1	Installation plate	1	5	Remote control holder	1
2	Installation plate fixing screw	5	6	Remote control holder fixing screw	2
3	Remote Control	1	Applicable piping kit		
4	Battery	2	Piping size		
			Gas		
			Liquid		
			CZ-3F5, 7BP		
			9.52 mm (3/8")		
			6.35 mm (1/4")		
			CZ-4F5, 7, 10BP		
			12.7 mm (1/2")		
			6.35 mm (1/4")		
			CZ-52F5, 7, 10BP		
			15.88 mm (5/8")		
			6.35 mm (1/4")		

### SELECT THE BEST LOCATION

INDOOR UNIT	OUTDOOR UNIT
<ul style="list-style-type: none"> <li>Do not install the unit in excessive oil fume area such as kitchen, workshop and etc.</li> <li>There should not be any heat source or steam near the unit.</li> <li>There should not be any obstacles blocking the air circulation.</li> <li>A place where air circulation in the room is good.</li> <li>A place where drainage can be easily done.</li> <li>A place where noise prevention is taken into consideration.</li> <li>Do not install the unit near the door way.</li> <li>Ensure the spaces indicated by arrows from the wall, ceiling, fence or other obstacles.</li> <li>Indoor unit of this air conditioner shall be installed in a height of at least 1.8 m.</li> </ul>	<ul style="list-style-type: none"> <li>If an awning is built over the unit to prevent direct sunlight or rain, be careful that heat radiation from the condenser is not obstructed.</li> <li>There should not be any animal or plant which could be affected by hot air discharged.</li> <li>Keep the spaces indicated by arrows from wall, ceiling, fence or other obstacles.</li> <li>Do not place any obstacles which may cause a short circuit of the discharged air.</li> <li>If piping length is over the [piping length for additional gas], additional refrigerant should be added as shown in the (Table A).</li> </ul>

Table A

Model	Capacity (HP)	Piping size		Std. Length (m)	Max. Elevation (m)	Min. Piping Length (m)	Max. Piping Length (m)	Additional Refrigerant (g/m)	Piping Length for add. gas (m)	Max. Refrigerant Charge (kg)	A <sub>min</sub> (m²)
		Gas	Liquid								
RU18**	2.0HP	12.7 mm (1/2")	6.35 mm (1/4")	5	20	3	30	15	10	1.25	Not applicable
RU24**	2.5HP	15.88 mm (5/8")			20	3	30	25	10	1.76	Not applicable

Example: For RU18\*\*

If unit is installed at 15 m distance,

the quantity of additional refrigerant should be

= 15 m (distance) - 10 m (piping length for additional gas)

>= 5 m

=> 5 m x 15 g/5m (additional Refrigerant) => 

75 g

$$A_{min} = (m_r / (2.5 \times (LFL)^{0.67} \times h_v))^2$$

\*\* not less than safety factor margin

A<sub>min</sub> = Required minimum room area, in m²

m<sub>r</sub> = Refrigerant charge in appliance, in kg

LFL = Lower flammability limit (0.307 kg/m³)

h<sub>v</sub> = Installation height of the appliance : (1.8 m for wall mounted)

SF = Safety factor with a value of 0.75.

Example: For RU18\*\*\*  
If the unit is installed at 15 m distance, the quantity of additional refrigerant should be  
>= 15 m (distance) - 10 m (piping length for additional gas)  
>= 5 m  
>= 5 m x 15 g/m (additional Refrigerant) => **75 g**

(\*)=> Systems with total refrigerant charge, m, lower than 1.84 kg are not subjected to any room area requirements.

\*\* The required minimum room area, shall also be governed by the safety factor margin formula below

$A_{min} = m_r / (SF \times LFL \times h_o)$  The higher value shall be taken when determining the room area.

### CAUTION

#### 1. General

- Must ensure the installation of pipe-work shall be kept to a minimum. Avoid use dented pipe and do not allow acute bending.
- Ensure that the physical and chemical properties of the pipe-work shall be protected from physical damage.
- Must comply with national gas regulations, state municipal rules and legislation.
- Notify relevant authorities in accordance with all applicable regulations.
- Must ensure mechanical connections be accessible for maintenance purposes.
- In cases that require mechanical ventilation, ventilation openings shall be kept clear of obstruction.
- When disposal of the product, do follow to the precautions in #11 and comply with national regulations.
- In case of field charge, the effect on refrigerant charge caused by the different pipe length has to be quantified, measured and labelled. Always in contact to local municipal offices for proper handling.
- Ensure the actual refrigerant charge is in accordance with the room size within which the refrigerant containing parts are installed.
- Ensure refrigerant charge not to leak.
- Wear appropriate protective equipment, including respiratory protection, as conditions warrant.
- Keep all sources of ignition and hot metal surfaces away.

#### 2. Servicing

##### 2-1. Qualification of workers

- Any qualified person who is involved with working on or breaking into a refrigerant circuit should hold a current valid certificate from an industry-accredited assessment authority, which authorizes their competence to handle refrigerants safely in accordance with the relevant assessment specification.
- Servicing shall only be performed as recommended by the equipment manufacturer. Maintenance and repair requiring the assistance of other skilled personnel shall be carried out under the supervision of the person competent in the use of flammable refrigerants.
- Servicing shall be performed only as recommended by the manufacturer.
- The system is inspected, regularly supervised and maintained by a trained and certified service personnel who is employed by the person user or party responsible.

##### 2-2. Checks to the area

- Prior to beginning work on systems containing flammable refrigerants, safety checks are necessary to ensure that the risk of ignition is minimised.
- For repair to the refrigerating system, the precautions in #2-3 to #2-7 must be followed before conducting work on the system.

##### 2-3. Work procedure

- Work shall be undertaken under a controlled procedure so as to minimize the risk of a flammable gas or vapour being present while the work is being performed.

##### 2-4. General work area

- All maintenance staff and others working in the local area shall be instructed and supervised on the nature of work being carried out.
- Avoid working in confined spaces. Always ensure away from source, at least 2 meter of safety distance, or zoning of free space area of at least 2 meter in radius.

##### 2-5. Checking for presence of refrigerant

- The area shall be checked with an appropriate refrigerant detector prior to and during work, to ensure the technician is aware of potentially flammable atmospheres.
- Ensure that the leak detection equipment being used is suitable for use with flammable refrigerants, i.e. non sparking, adequately sealed or intrinsically safe.
- In case of leakage/spillage happened, immediately ventilate area and stay upwind and away from spill/release.
- In case of leakage/spillage happened, do notify persons down wind of the leaking/spill, isolate immediate hazard area and keep unauthorized personnel out.

##### 2-6. Presence of fire extinguisher

- If any hot work is to be conducted on the refrigerating equipment or any associated parts, appropriate fire extinguishing equipment shall be available at hand.
- Have a dry powder or CO<sub>2</sub> fire extinguisher adjacent to the charging area.

##### 2-7. No ignition sources

- No person carrying out work in relation to a refrigerating system which involves exposing any pipe work that contains or has contained flammable refrigerant shall use any sources of ignition in such a manner that it may lead to the risk of fire or explosion. He/She must not be smoking when carrying out such work.
- All possible ignition sources, including cigarette smoking, should be kept sufficiently far away from the site of installation, repairing, recharging or maintenance work. Flammable refrigerant can possibly be released to the surrounding space.
- Prior to work taking place, the area around the equipment is to be surveyed to make sure that there are no flammable hazards or ignition risks.
- "No Smoking" signs shall be displayed.


##### 2-8. Ventilated area

- Ensure that the area is in the open or that it is adequately ventilated before breaking into the system or conducting any hot work.
- A degree of ventilation shall continue during the period that the work is carried out.
- The ventilation should safely disperse any released refrigerant and preferably expel it externally into the atmosphere.

##### 2-9. Checks to the refrigerating equipment

- Where electrical components are being changed, they shall be fit for the purpose and to the correct specification.
- At all times the manufacturer's maintenance and service guidelines shall be followed.
- If in doubt consult the manufacturer's technical department for assistance.
- The following checks shall be applied to installations using flammable refrigerants.
  - The actual refrigerant charge is in accordance with the room size within which the refrigerant containing parts are installed.
  - The ventilation machinery and outlets are operating adequately and are not obstructed.
  - If an indirect refrigerating circuit is being used, the secondary circuit shall be checked for the presence of refrigerant.
  - Marking to the equipment continues to be visible and legible. Markings and signs that are illegible shall be corrected.
  - Refrigerating pipe or components are installed in a position where they are unlikely to be exposed to any substance which may corroded refrigerant containing components, unless the components are constructed of materials which are inherently resistant to being corroded or are properly protected against being so corroded.


### Indoor/Outdoor Unit Installation Diagram

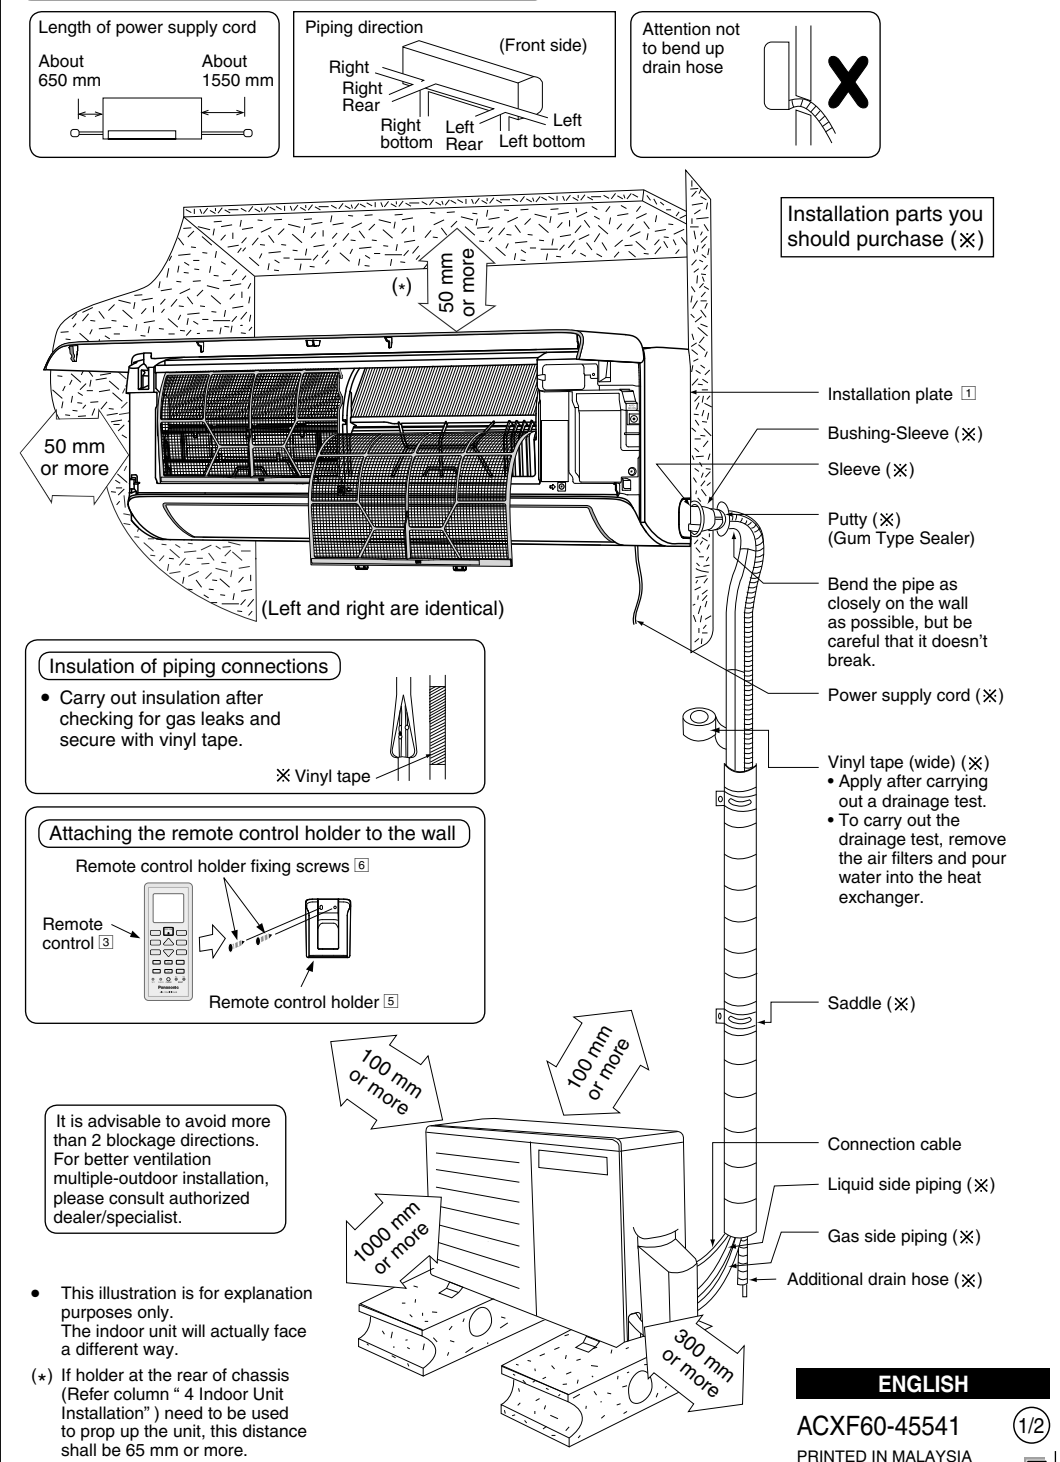

## 1 SELECT THE BEST LOCATION (Refer to "Select the best location" section)

## 2 HOW TO FIX INSTALLATION PLATE

The mounting wall shall be strong and solid enough to prevent it from vibration.

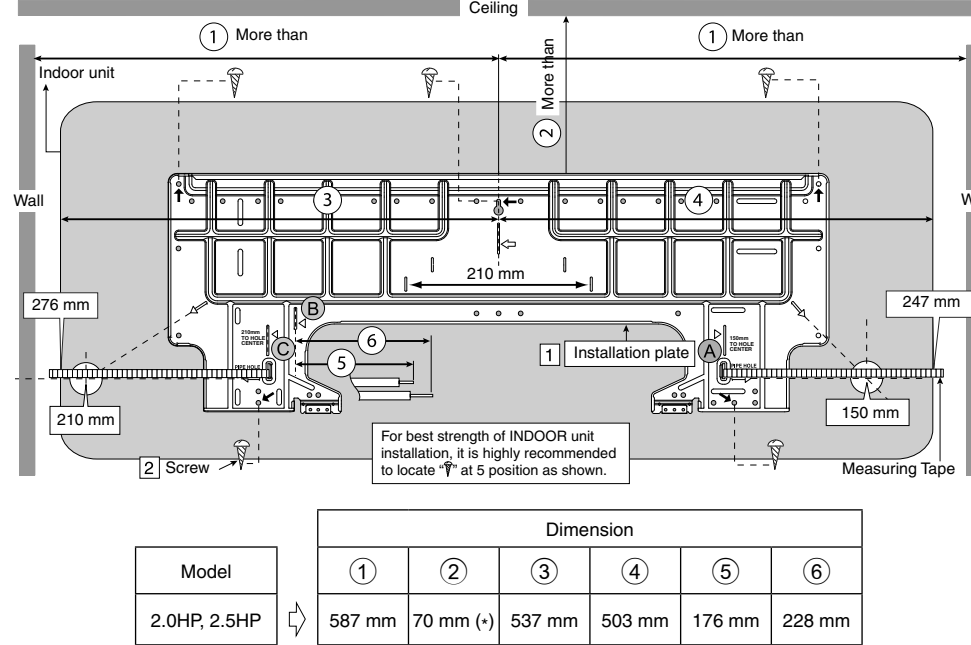

- The center of installation plate should be at more than ① at right and left of the wall.
- The distance from installation plate edge to ceiling should be more than ②.
- From installation plate center to unit's left side is ③.
- From installation plate center to unit's right side is ④.

- For left side piping, piping connection for liquid should be about ⑤ from this line.
- For left side piping, piping connection for gas should be about ⑥ from this line.

- Mount the installation plate on the wall with 5 screws or more (at least 5 screws). (If mounting the unit on the concrete wall, consider using anchor bolts.)
- Always mount the installation plate horizontally by aligning the marking-off line with the thread and using a level gauge.
- Drill the piping plate hole with ø70 mm hole-core drill.
- Line according to the left and right side of the installation plate. The meeting point of the extended line is the center of the hole. Another method is by putting measuring tape at position as shown in the diagram above. The hole center is obtained by measuring the distance namely 210 mm for left hole and 150 mm for right hole (2.0 - 2.5HP).
- Drill the piping hole at either the right or the left and the hole should be slightly slanting to the outdoor side.


## 3 TO DRILL A HOLE IN THE WALL AND INSTALL A SLEEVE OF PIPING

- Insert the piping sleeve to the hole.
- Fix the bushing to the sleeve.
- Cut the sleeve until it extrudes about 15 mm from the wall.

### CAUTION

- When the wall is hollow, please be sure to use the sleeve for tube assembly to prevent dangers caused by mice biting the connection cable.

- Finish by sealing the sleeve with putty or caulking compound at the final stage.

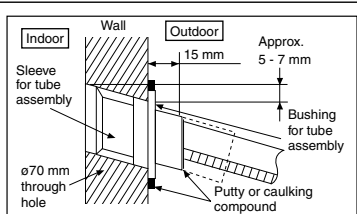


## 1 SELECT THE BEST LOCATION (Refer to "Select the best location" section)

## 2 INSTALL THE OUTDOOR UNIT

- After selecting the best location, start installation to Indoor/Outdoor Unit Installation Diagram.

- Fix the unit on concrete or rigid frame firmly and horizontally by bolt nut (ø10 mm). Make sure unit install in balance level to ensure that water flow out from unit drainage hole.
- When installing at roof, please consider strong wind and earthquake. Please fasten the installation stand firmly with bolt, screws or nails.

Model	A	B	C	D
2.0HP	540 mm	160 mm	18.5 mm	330 mm
2.5HP	613 mm	130 mm	24 mm	360.5 mm



## 3 CONNECT THE PIPING

### Connecting The Piping to Indoor

For connection joint of all models

Please make flare after inserting (locate at joint portion of tube assembly) onto the copper pipe. (In case of using long piping) Connect the piping. Align the center of piping and sufficiently tighten the flare nut with fingers.

- Further tighten the flare nut with torque wrench in specified torque as stated in the table.



### Connecting The Piping to Outdoor

Decide piping length and then cut by using pipe cutter.

Remove burrs from cut edge.

Make flare after inserting the flare nut (locate at valve) onto the copper pipe.

Align center of piping to valve and then tighten with torque wrench to the specified torque as stated in the table.

Piping size	Torque
6.35 mm (1/4")	18 N·m (1.8 kgf·m)
9.52 mm (3/8")	42 N·m (4.3 kgf·m)
12.7 mm (1/2")	55 N·m (5.6 kgf·m)
15.88 mm (5/8")	65 N·m (6.6 kgf·m)
19.05 mm (3/4")	100 N·m (10.2 kgf·m)

## 5 CONNECT THE CABLE TO THE OUTDOOR UNIT

- Remove the control board cover from the unit by loosening the screw.
- Connection cable between indoor unit and outdoor unit shall be approved polychloroprene sheathed 4 x 1.5 mm<sup>2</sup> (2.0HP) or 4 x 2.5 mm<sup>2</sup> (2.5HP) flexible cord, type designation 60245 IEC 57 or heavier cord. Do not use joint connection cable. Replace the wire if the existing wire (from concealed wiring, or otherwise) is too short.

Terminals on the outdoor unit	1	2	3	4
Colour of wires	1	2	3	4
Terminals on the indoor unit	1	2	3	4


- Secure the cable onto the control board with the holder (clammer).
- Attach the control board cover back to the original position with screw.
- For wire stripping and connection requirement, refer to instruction ⑤ of indoor unit.

- Earth wire shall be Yellow/Green (Y/G) in colour and longer than other AC wires for safety reason.

## 6 PIPING INSULATION

- Please carry out insulation at pipe connection portion as mentioned in Indoor/Outdoor Unit Installation Diagram. Please wrap the insulated piping end to prevent water from going inside the piping.
- If drain hose or connecting piping is in the room (where dew may form), please increase the insulation by using POLY-E FOAM with thickness 6 mm or above.

## 4 INDOOR UNIT INSTALLATION

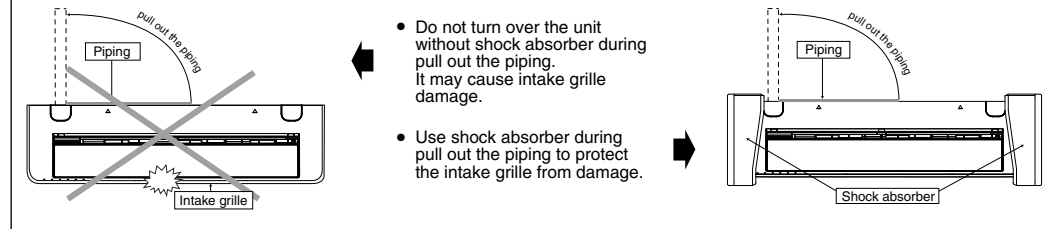

### 1. FOR THE RIGHT REAR PIPING

#### Step-1 Pull out the Indoor piping

#### Step-2 Install the Indoor Unit

#### Step-3 Secure the Indoor Unit

#### Step-4 Insert the connection cable

#### Step-5 Insulate and finish the piping

#### Step-6 Connect the piping

#### Step-7 Insulate and finish the piping

#### Step-8 Secure the Indoor Unit

#### Step-9 Secure the Indoor Unit

#### Step-10 Secure the Indoor Unit

#### Step-11 Secure the Indoor Unit

#### Step-12 Secure the Indoor Unit

#### Step-13 Secure the Indoor Unit

#### Step-14 Secure the Indoor Unit

#### Step-15 Secure the Indoor Unit

#### Step-16 Secure the Indoor Unit

#### Step-17 Secure the Indoor Unit

#### Step-18 Secure the Indoor Unit

#### Step-19 Secure the Indoor Unit

#### Step-20 Secure the Indoor Unit

#### Step-21 Secure the Indoor Unit

#### Step-22 Secure the Indoor Unit

#### Step-23 Secure the Indoor Unit

#### Step-24 Secure the Indoor Unit

#### Step-25 Secure the Indoor Unit

#### Step-26 Secure the Indoor Unit

#### Step-27 Secure the Indoor Unit

#### Step-28 Secure the Indoor Unit

#### Step-29 Secure the Indoor Unit

#### Step-30 Secure the Indoor Unit

#### Step-31 Secure the Indoor Unit

#### Step-32 Secure the Indoor Unit

#### Step-33 Secure the Indoor Unit

#### Step-34 Secure the Indoor Unit

#### Step-35 Secure the Indoor Unit

#### Step-36 Secure the Indoor Unit

#### Step-37 Secure the Indoor Unit

#### Step-38 Secure the Indoor Unit

#### Step-39 Secure the Indoor Unit

#### Step-40 Secure the Indoor Unit

#### Step-41 Secure the Indoor Unit

#### Step-42 Secure the Indoor Unit

#### Step-43 Secure the Indoor Unit

#### Step-44 Secure the Indoor Unit

#### Step-45 Secure the Indoor Unit

#### Step-46 Secure the Indoor Unit

#### Step-47 Secure the Indoor Unit

#### Step-48 Secure the Indoor Unit

#### Step-49 Secure the Indoor Unit

#### Step-50 Secure the Indoor Unit

#### Step-51 Secure the Indoor Unit

#### Step-52 Secure the Indoor Unit

#### Step-53 Secure the Indoor Unit

#### Step-54 Secure the Indoor Unit

#### Step-55 Secure the Indoor Unit

#### Step-56 Secure the Indoor Unit

#### Step-57 Secure the Indoor Unit

#### Step-58 Secure the Indoor Unit

#### Step-59 Secure the Indoor Unit

#### Step-60 Secure the Indoor Unit

#### Step-61 Secure the Indoor Unit

#### Step-62 Secure the Indoor Unit

#### Step-63 Secure the Indoor Unit

#### Step-64 Secure the Indoor Unit

#### Step-65 Secure the Indoor Unit

#### Step-66 Secure the Indoor Unit

#### Step-67 Secure the Indoor Unit

#### Step-68 Secure the Indoor Unit

### 2. FOR THE RIGHT AND RIGHT BOTTOM PIPING

#### Step-1 Pull out the Indoor piping

#### Step-2 Install the Indoor Unit

#### Step-3 Secure the Indoor Unit

#### Step-4 Insert the connection cable

#### Step-5 Insulate and finish the piping

#### Step-6 Connect the piping

#### Step-7 Insulate and finish the piping

#### Step-8 Secure the Indoor Unit

#### Step-9 Secure the Indoor Unit

#### Step-10 Secure the Indoor Unit

#### Step-11 Secure the Indoor Unit

#### Step-12 Secure the Indoor Unit

#### Step-13 Secure the Indoor Unit

#### Step-14 Secure the Indoor Unit

#### Step-15 Secure the Indoor Unit

#### Step-16 Secure the Indoor Unit

#### Step-17 Secure the Indoor Unit

#### Step-18 Secure the Indoor Unit

#### Step-19 Secure the Indoor Unit

#### Step-20 Secure the Indoor Unit

#### Step-21 Secure the Indoor Unit

#### Step-22 Secure the Indoor Unit

#### Step-23 Secure the Indoor Unit

#### Step-24 Secure the Indoor Unit

#### Step-25 Secure the Indoor Unit

#### Step-26 Secure the Indoor Unit

#### Step-27 Secure the Indoor Unit

#### Step-28 Secure the Indoor Unit

#### Step-29 Secure the Indoor Unit

#### Step-30 Secure the Indoor Unit

#### Step-31 Secure the Indoor Unit

#### Step-32 Secure the Indoor Unit

#### Step-33 Secure the Indoor Unit

#### Step-34 Secure the Indoor Unit

#### Step-35 Secure the Indoor Unit

#### Step-36 Secure the Indoor Unit

#### Step-37 Secure the Indoor Unit

#### Step-38 Secure the Indoor Unit

#### Step-39 Secure the Indoor Unit

#### Step-40 Secure the Indoor Unit

#### Step-41 Secure the Indoor Unit

#### Step-42 Secure the Indoor Unit

#### Step-43 Secure the Indoor Unit

#### Step-44 Secure the Indoor Unit

#### Step-45 Secure the Indoor Unit

#### Step-46 Secure the Indoor Unit

#### Step-47 Secure the Indoor Unit

#### Step-48 Secure the Indoor Unit

#### Step-49 Secure the Indoor Unit

#### Step-50 Secure the Indoor Unit

#### Step-51 Secure the Indoor Unit

#### Step-52 Secure the Indoor Unit

#### Step-53 Secure the Indoor Unit

#### Step-54 Secure the Indoor Unit

#### Step-55 Secure the Indoor Unit

#### Step-56 Secure the Indoor Unit

#### Step-57 Secure the Indoor Unit

#### Step-58 Secure the Indoor Unit

#### Step-59 Secure the Indoor Unit

#### Step-60 Secure the Indoor Unit

#### Step-61 Secure the Indoor Unit

#### Step-62 Secure the Indoor Unit

#### Step-63 Secure the Indoor Unit

#### Step-64 Secure the Indoor Unit

#### Step-65 Secure the Indoor Unit

#### Step-66 Secure the Indoor Unit

#### Step-67 Secure the Indoor Unit

#### Step-68 Secure the Indoor Unit

## 3. FOR THE EMBEDDED PIPING

### Step-1 Change the drain hose position

### Step-2 Bend the embedded piping

### Step-3 Pull the connection cable into Indoor Unit

### Step-4 Cut and flare the embedded piping

### Step-5 Install the Indoor Unit

### Step-6 Connect the piping

### Step-7 Insulate and finish the piping

### Step-8 Secure the Indoor Unit

### Step-9 Secure the Indoor Unit

### Step-10 Secure the Indoor Unit

### Step-11 Secure the Indoor Unit

### Step-12 Secure the Indoor Unit

### Step-13 Secure the Indoor Unit

### Step-14 Secure the Indoor Unit

### Step-15 Secure the Indoor Unit

### Step-16 Secure the Indoor Unit

### Step-17 Secure the Indoor Unit

### Step-18 Secure the Indoor Unit

### Step-19 Secure the Indoor Unit

### Step-20 Secure the Indoor Unit

### Step-21 Secure the Indoor Unit

### Step-22 Secure the Indoor Unit

### Step-23 Secure the Indoor Unit

### Step-24 Secure the Indoor Unit

### Step-25 Secure the Indoor Unit

### Step-26 Secure the Indoor Unit

### Step-27 Secure the Indoor Unit

### Step-28 Secure the Indoor Unit

### Step-29 Secure the Indoor Unit

### Step-30 Secure the Indoor Unit

### Step-31 Secure the Indoor Unit

### Step-32 Secure the Indoor Unit

### Step-33 Secure the Indoor Unit

### Step-34 Secure the Indoor Unit

### Step-35 Secure the Indoor Unit

### Step-36 Secure the Indoor Unit

### Step-37 Secure the Indoor Unit

### Step-38 Secure the Indoor Unit

### Step-39 Secure the Indoor Unit

### Step-40 Secure the Indoor Unit

### Step-41 Secure the